

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 January 2002 (03.01.2002)

PCT

(10) International Publication Number
WO 02/01879 A2

(51) International Patent Classification⁷: H04N 7/24

(21) International Application Number: PCT/EP01/07209

(22) International Filing Date: 25 June 2001 (25.06.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0016238.8 30 June 2000 (30.06.2000) GB

(71) Applicant: NOKIA OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors: AALTONEN, Janne; Hirvikoirankatu 15, FIN-20900 Turku (FI). SALO, Juha; Noppakatu 6 b 3, FIN-20660 Littoinen (FI).

(74) Agents: JOHNSON, Ian et al.; Nokia IPR Department, Nokia House, Summit Avenue, Farnborough,, Hampshire GU 14 ONG (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RECEIVER

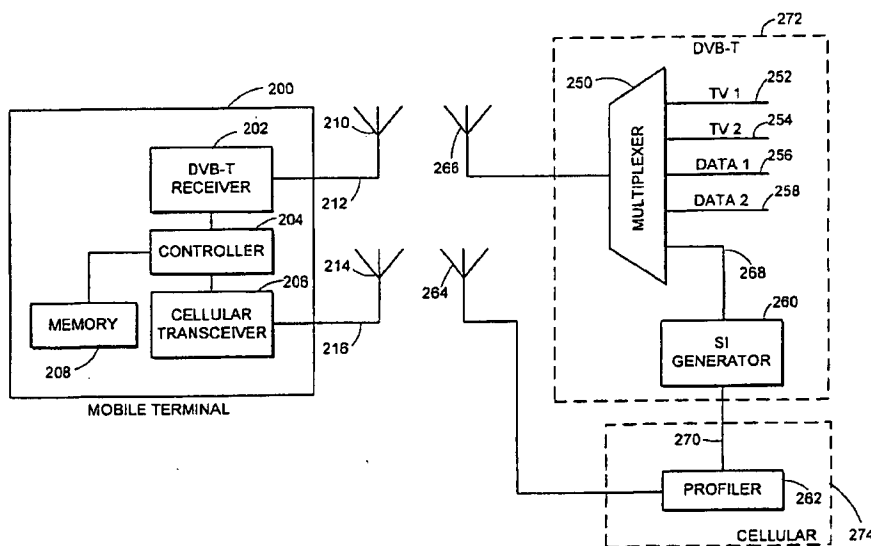

(57) Abstract: The present invention relates to receivers such as multi-carrier and cellular receivers. Cellular receivers, in the form of portable radiotelephones are commonplace, and their design and operation is well understood. Such portable radiotelephones can be used for making and receiving telephone calls, sending and receiving messages, and even browsing world-wide computer network such as the Internet. Many standards exist for portable radiotelephones, including global system for mobile communications (GSM), general radio packet service (GPRS) Receivers capable of receiving digital television signals, such as signals according to the terrestrial digital video broadcasting (DVB-T) standard are also commonplace. The present invention provides a method and apparatus for receiving and transmitting signals via multiple communication channels.



WO 02/01879 A2

RECEIVER

The present invention relates to receivers such as multi-carrier and cellular receivers.

- 5 Cellular receivers, in the form of portable radiotelephones are commonplace, and their design and operation is well understood. Such portable radiotelephones can be used for making and receiving telephone calls, sending and receiving messages, and even browsing world-wide computer network such as the Internet. Many standards exist for portable
10 radiotelephones, including global system for mobile communications (GSM), general radio packet service (GPRS)

Receivers capable of receiving digital television signals, such as signals according to the terrestrial digital video broadcasting (DVB-T) standard are
15 also commonplace.

The use and operation of consumer set-top-boxes (STB) for receiving digital video broadcasting (DVB-T) transmissions are well known. Such STBs are capable of receiving a large number of digital television channels, data and
20 other interactive services.

According to a first aspect of the present invention, there is provided a terminal having a first receiver for receiving a first signal from a first communications network comprising: a second receiver for receiving a second
25 signal conveying complementary information relating to said first signal from a second communications network.

Advantageously, the present invention provides a receiver having a first and a second receiver for receiving signals from two different communications
30 networks. In a first embodiment of the present invention this results in increased power efficiency, since one of the receivers can be effectively

switched off whilst not required. Schedule or configuration data can, however, still be received on the other receiver. The received schedule or configuration data can be used to switch on the other receiver at an appropriate time. This configuration allows the receiver to receive non-scheduled data, such as news
5 flashes, results from sporting events, share prices etc.

According to a second aspect of the present invention, there is provided apparatus for transmitting a signal to a receiver via a first communications network comprising: a transmitter for transmitting complementary information
10 relating to said signal via a second communication network.

According to a third aspect of the present invention, there is provided a method of receiving a first signal from a first communications network comprising: receiving a second signal conveying complementary information
15 relating to said first signal from a second communications network.

According to a fourth aspect of the present invention, there is provided a method of transmitting a signal to a receiver via a first communications network comprising: transmitting complementary information relating to said
20 signal via a second communication network.

The invention will now be described, by way of example only, with reference to the accompanying diagrams, in which:

25 Figure 1 is a block diagram of a typical consumer receiver/transmitter arrangement; and
Figure 2 is a block diagram of a first embodiment according to the present invention.

Figure 1 is a block diagram of a typical consumer receiver/transmitter arrangement in which a terrestrial digital video broadcasting (DVB-T) transmitter 150 transmits a DVB-T signal to a DVB-T set-top-box receiver 106.

5 In the transmitter 150, a number of television channels 154 and 156 are multiplexed together with a number of data channels 158 and 160 by a multiplexer 152. In addition to this, service information (SI) 162, which contains details of each of the other multiplexed channels, is also input to the multiplexer 152, provided by a SI generator 164. The multiplexer creates a
10 single, multiplexed, signal 166 which contains all of the separate channels 154, 156, 158 and 160, along with the SI 162. Further details of the multiplexing and SI may be found in the DVB-T specification (EN 300 468) which is incorporated herein by reference. The multiplexed signal 166 is transmitted via an antenna 164, across a transmission channel, to an antenna
15 102 of a set-top-box receiver 106. In the case of DVB-T, the transmission channel is a terrestrial transmission channel. However, the transmission channel could, alternatively, be a satellite, microwave, cable or optical channel.

20 The signals received by the antenna 102 are input to a DVB-T receiver 100 which enables the user to select a desired channel. Received data may also be stored in a memory 104.

Whilst the set-top-box 106 is switched on, the DVB-T receiver 100 is also
25 powered up and receiving DVB-T signals. The DVB-T receiver is constantly decoding SI information which provides details of the content and location of each of the channels within the received multiplexed signal. The SI information also contain schedule details for each of the multiplexed channels. The schedule details allow a user to watch or record a specific
30 programme of interest. For example, if the set-top-box 106 is connected to a personal computer (not shown), it is possible to receive data transmitted over the DVB-T network for use with the personal computer. In this way, the

transmission of large data files can be broadcast, to a large audience, using the high data rates provided by DVB-T transmission. If a data file is due to be transmitted at a certain time on a certain channel, the SI information will contain this information which can be used by the personal computer to
5 ensure that receiver receives the required data.

SI information may change frequently, to reflect not only changes in program scheduling, but also to reflect re-allocation of frequencies and channels etc by the broadcaster. For example, it is possible for a channel to broadcast on a
10 different frequency to originally scheduled. Since the SI contains details of the frequencies (or changes to the frequencies), a receiver should always be able to receive the desired channel and/or program. Some set-top-boxes store SI information in a memory, thereby allowing users to browse a schedule or program guide. However, due to the nature of SI information, the SI
15 information is updated frequently to ensure that no discrepancies exist between the SI stored by the set-top-box and the SI being transmitted by the broadcaster.

Figure 2 shows a block diagram of a first embodiment according to the
20 present invention. A mobile terminal 200 receives DVB-T transmissions from a DVB-T transmitter 272. The transmitted DVB-T signal is a multiplexed signal produced by a multiplexer 250. The multiplexer 250 accepts as inputs a number of channels 252, 254, 256 and 258 to produce the multiplexed signal. The channels may be television, audio or data channels. Service information
25 (SI) data, which contains details of the multiplexed channels, is also input to the multiplexer 250. The SI data is generated by a SI generator 260, which may be a database containing schedule and location details of each of the channels.

30 The DVB-T signals are received by an antenna 210 of the mobile terminal 200 and are received and decoded by a DVB-T receiver 202.

In addition, and advantageously, the mobile terminal also receives an interactive channel from a cellular or other transmission network 274 at a cellular transceiver 206. The cellular transceiver 206 allows both the reception and transmission of signals between the mobile terminal 200 and
5 the cellular network 274. The cellular network may be a GSM network, a general packet radio service (GPRS), third generation (3G) or other suitable network.

SI data generated by the SI generator 260 is also supplied to a profiler 262 of
10 the cellular network 274. The profiler contains a database of information about each of the subscribers to the cellular network 274. The profiler may contain information such as, demographic data, income level, sports leisure interests, etc.

15 The operation of a first embodiment of the present invention will now be described by way of example.

According to the prior art, if a user wishes to receive a video clip each time his favourite football team scores during a football match, it is necessary that the
20 DVB-T receiver 100 in the DVB-T set-top-box 106 is constantly powered up and is constantly receiving SI data. This is since the exact timing of when a goal will be scored is not known in advance. Accordingly, no schedule will exist in the SI data for this event. A DVB-T receiver must therefore wait for the SI data to indicate when the video clip will be broadcast. If the user is only
25 interested in receiving video clips of the football match, this is particularly inefficient in terms of power consumption, especially for mobile terminals, since the DVB-T receiver just waiting, consuming power, for a specific video clip to be broadcast.

30 According to a first embodiment of the present invention, as exemplified in Figure 2, the subscriber registers his interest in receiving video clips with the profiler 262 of the cellular network 274. The DVB-T receiver 202 of the mobile

terminal 200 may then be powered down. When a goal is scored, and a video clip is available for broadcast, the broadcaster must schedule the video clip to be included in the existing DVB-T multiplex signal. This may involve rescheduling existing programs, and updating the SI data accordingly. Once a
5 scheduled time has been established for the broadcast of the video clip, a service announcement is sent by the cellular network 274 to the cellular transceiver 206. The service announcement is received by the cellular transceiver 206 and is processed by the controller 204. The controller informs the DVB-T receiver 202 of when the video clip will be broadcast and other
10 relevant associated data, such as channel location, encryption parameters etc. The DVB-T receiver can be powered up and configured in time to receive and decode the video clip. The video clip may also be stored in a memory 208. Once the desired video clip, or other data, has been received, the DVB-T receiver 202 can be once again powered down.

15

The service announcement may be in the form of SI data, or may alternatively be in the form of a special short message service (SMS) message containing the necessary timing and location information required by the DVB-T receiver. Alternative forms of service announcement may be used, both in terms of the
20 data required to be sent and the protocol which is used for sending it.

In this way, the DVB-T receiver 202 can be powered down when not required for actual reception of data. This can produce large savings in power consumption, compared to the system of the prior art.

25

The profiler 262 also controls whether requested information is transmitted to a user via the DVB-T or cellular network. For example, if one million people have requested to see a video clip of goals from a particular football match, it is better to transmit the video clip via the DVB-T network. For such a large
30 number of users, the DVB-T network provides a cost effective delivery means. The alternative would be to individually send the video clip via the cellular

network which, with so many users, could impact severely on the operation of the cellular network.

5 If the number of users requesting to see a particular video clip is much smaller, it may be more economical to send it individually via the cellular network. The exact threshold levels will vary according to the pricing structure of the DVB-T and cellular networks, as well as the number of users requesting a particular item, and the volume of data required to be sent.

10 The cellular transceiver 206 may also be used to send an acknowledgement back to the cellular network 274, indicating whether the video clip was correctly received. This may be used for billing purposes, or also to request a re-sending of the video clip if it not received due to poor signal strength etc. Re-sending of the video clip may again take place either via the DBV-T or
15 cellular network depending on demand and cost effectiveness.

A further advantage of the present invention is that, if schedule announcements are sent over the cellular network, it is possible to remove some or all of the SI data from DVB-T network. Since the SI data typically
20 occupies up to 3Mbits^{-1} this redundant bandwidth could be used for providing additional data or video channels.

In a further embodiment of the present invention, a profiler may be included in the mobile terminal 200. This may be instead of, or in addition to, the profiler
25 262 of the cellular network 274. A profiler on the mobile terminal may be used if the communications network used for the interactive channel supports broadcasting of data, such as via a GPRS network or other packet type network. The profiler can be configured according to user preferences, and will only accept service announcements which comply with the user
30 preferences.

Those skilled in the art will appreciate that although the present invention is described above with reference to DVB-T transmissions, the invention is not limited thereto. The same techniques could be applied to DVB (satellite) reception and transmission or any other similar or equivalent standards.

- 5 Equally, references to cellular networks and cellular transmission techniques could be replaced by fixed line, public switched telephone networks, or any other type of suitable communications network.

- 10 It will be apparent from the foregoing the present invention is not limited to the delivery of televisual content. Indeed, as has been indicated previously, digital video broadcasting may provide data and other interactive services.

- For example, on-line banking and other customer orientated services can use the present invention to improve the transmission of data, including Internet
15 pages, to subscribers. For example, an on-line bank could broadcast using the broadcast network pages of information containing high quality graphics, standard texts etc. Each page could then be personalised using personal data transmitted over an interactive channel provided by a second network such as GSM, GPRS or other future generation network. For example, a
20 generic 'balance' sheet could be broadcast to all users containing the bank logo, background images etc. Personal balance data transmitted over the interactive channel could then be combined with the broadcast 'balance' sheet, to present to the user their own personal balance sheet.

CLAIMS

1. A terminal having a first receiver for receiving a first signal from a first
5 communications network comprising:
a second receiver for receiving a second signal conveying complementary
information relating to said first signal from a second communications
network.
- 10 2. A terminal according to claim 1, further comprising a controller for
configuring said first receiver according to said complementary
information.
- 15 3. A terminal according to claim 1 or 2, wherein said first receiver is enabled
to receive said first signal in response to said complementary information.
4. A terminal according to claim 1, 2 or 3, wherein said complementary
information comprises schedule and configuration data.
- 20 5. A terminal according to any preceding claim, further comprising storage
means for storing user preferences.
6. A terminal according to claim 5, further comprising decision means for
deciding whether said second signal should enable said first receiver in
25 dependence on the stored user preferences.
7. A terminal according to any preceding claim, wherein said first signal is a
digital video broadcasting (DVB) signal, and said first receiver is a digital
video broadcasting (DVB) receiver.

8. A terminal according to any preceding claim, wherein said second signal is a global system for mobile (GSM) signal, and said second receiver is a global system for mobile (GSM) receiver.
- 5 9. A terminal according to any of claims 1 to 7, wherein said second signal is a general packet radio service (GPRS) signal, and said second receiver is a general packet radio service (GPRS) receiver.
- 10 10. A terminal according to any one of claims 1 to 9, wherein the first signal includes a data file, said terminal being actuatable in response to said complementary information to receive said data file.
11. Apparatus for transmitting a signal to a receiver via a first communications network comprising:
- 15 a transmitter for transmitting complementary information relating to said signal via a second communication network.
12. Apparatus according to claim 11, wherein said complementary information comprises schedule and configuration data relating to said first signal.
- 20 13. Apparatus according claim 11 or 12, further comprising storage means for storing details of subscriber preferences.
14. Apparatus according to claim 13, further comprising decision means for
- 25 deciding to which subscribers to transmit said second signal in dependence on said stored subscriber preferences.
15. Apparatus according to any of claims 11 to 14, wherein said first signal is a digital video broadcasting (DVB) signal, and said first communications
- 30 network is a digital video broadcasting (DVB) network.

- 16.Apparatus according to any of claims 11 to 15, wherein said second communications network is a global system for mobile (GSM) network, and said transmitter is a global system for mobile (GSM) transmitter.
- 5 17.Apparatus according to any of claims 11 to 15, wherein said second communications network is a general packet radio service (GPRS) network, and said transmitter is a general packet radio service (GPRS) transmitter.
- 10 18.A method of receiving a first signal from a first communications network comprising:
receiving a second signal conveying complementary information relating to said first signal from a second communications network.
- 15 19.A method according to claim 18, further comprising receiving said first signal in accordance with said complementary information.
- 20.A method according to claim 18 or 19, further comprising storing user preferences.
- 20 21.A method according to claim 20, further comprising deciding whether said second signal should be received in dependence on said stored user preferences.
- 25 22.A method of transmitting a signal to a receiver via a first communications network comprising:
transmitting complementary information relating to said signal via a second communication network.
- 30 23.A method according to claim 22, wherein the step of transmitting complementary information comprises transmitting schedule and configuration data relating to said signal.

24. A method according to claim 22 or 23, further comprising storing details of subscriber preferences.
- 5 25. A method according to claim 24, further comprising deciding whether to transmit said complementary information to a subscriber in dependence on said stored preferences.
26. A method according to any of claims 22 to 25, comprising transmitting said signal as a digital video broadcasting (DVB) signal.
- 10 27. A method according to any of claims 22 to 26, comprising transmitting said complementary information via a global system for mobile (GSM) network.
- 15 28. A method according to any of claims 22 to 26, comprising transmitting said complementary information via a general packet radio service (GPRS) network.
- 20 29. A method of transmitting a signal to a receiver via a first communications network, comprising receiving a request for non-scheduled content to be included in said signal and transmitting service information via a second communications network identifying availability of said non-scheduled content.
- 25 30. A method as claimed in Claim 29, wherein said service information is generated in accordance with changes to scheduled content to include said non-scheduled content in said signal.
- 30 31. A method as claimed in Claim 29 or Claim 30, wherein said service information includes schedule and configuration data relating to said signal.

32.A method as claimed in any one of Claims 29 to 31, wherein said service information identifies a time and channel location at which said non-scheduled content will be transmitted.

5 33.A method of receiving a first signal from a first communications network, comprising requesting non-scheduled content to be included in said signal, receiving a second signal conveying service information via a second communications network identifying availability of said non-scheduled content and activating reception of said first signal in
10 accordance therewith.

34.A method as claimed in Claim 33, wherein reception of said first signal is deactivated following reception of said non-scheduled content.

15 35.A method as claimed in Claim 33 or Claim 34, wherein acknowledgement of reception of said non-scheduled content is made to said first communications network.

20 36.A method as claimed in any one of Claims 33 to 35, including storing said non-scheduled content following reception of said signal.

25 37.A method of transmitting a signal to a receiver via a first communications network comprising transmitting complementary information relating to said signal via a second communications network, wherein said first signal contains public data and said complementary information contains personal data.

30 38.A method of receiving a first signal from a first communications network comprising receiving a second signal conveying complementary information relating to said first signal from a second communications network, and combining said information from said second signal with content in said first signal.

39.A method as claimed in Claim 38, wherein said complementary information comprises personal data, said data being combined with generic data forming said content of said first signal.

5 40.A method as claimed in Claim 38 or Claim 39, wherein said second signal further comprises schedule and configuration data relating to said first signal identifying said content.

10 41.A terminal substantially as hereinbefore described with reference to the accompanying drawings.

42.Apparatus for transmitting a signal substantially as hereinbefore described with reference to the accompanying drawings.

15 43.A method of receiving substantially as hereinbefore described with reference to the accompanying drawings.

44.A method of transmitting substantially as hereinbefore described with reference to the accompanying drawings.

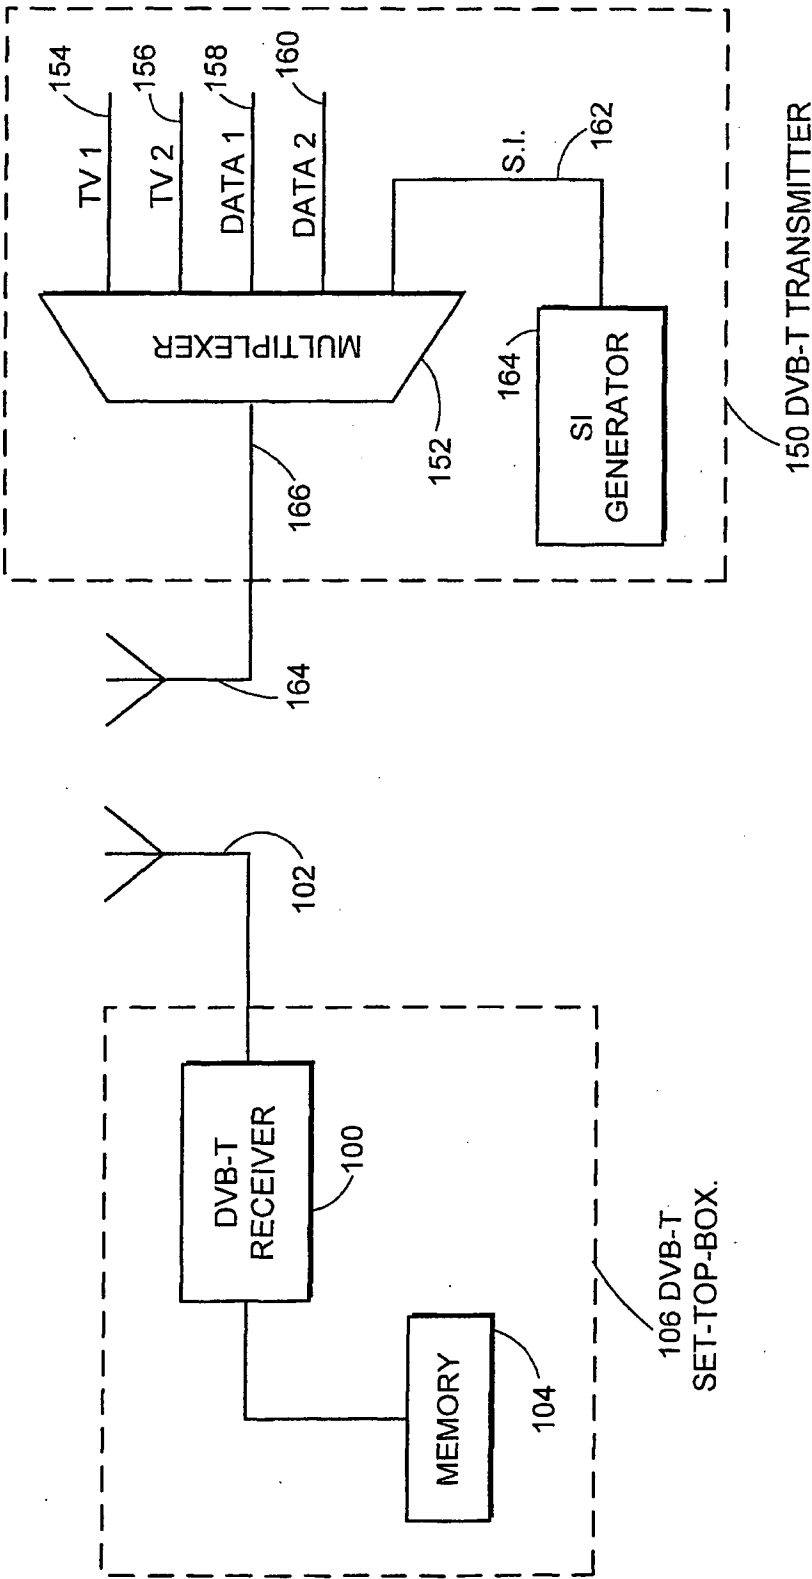


FIG.1 PRIOR ART

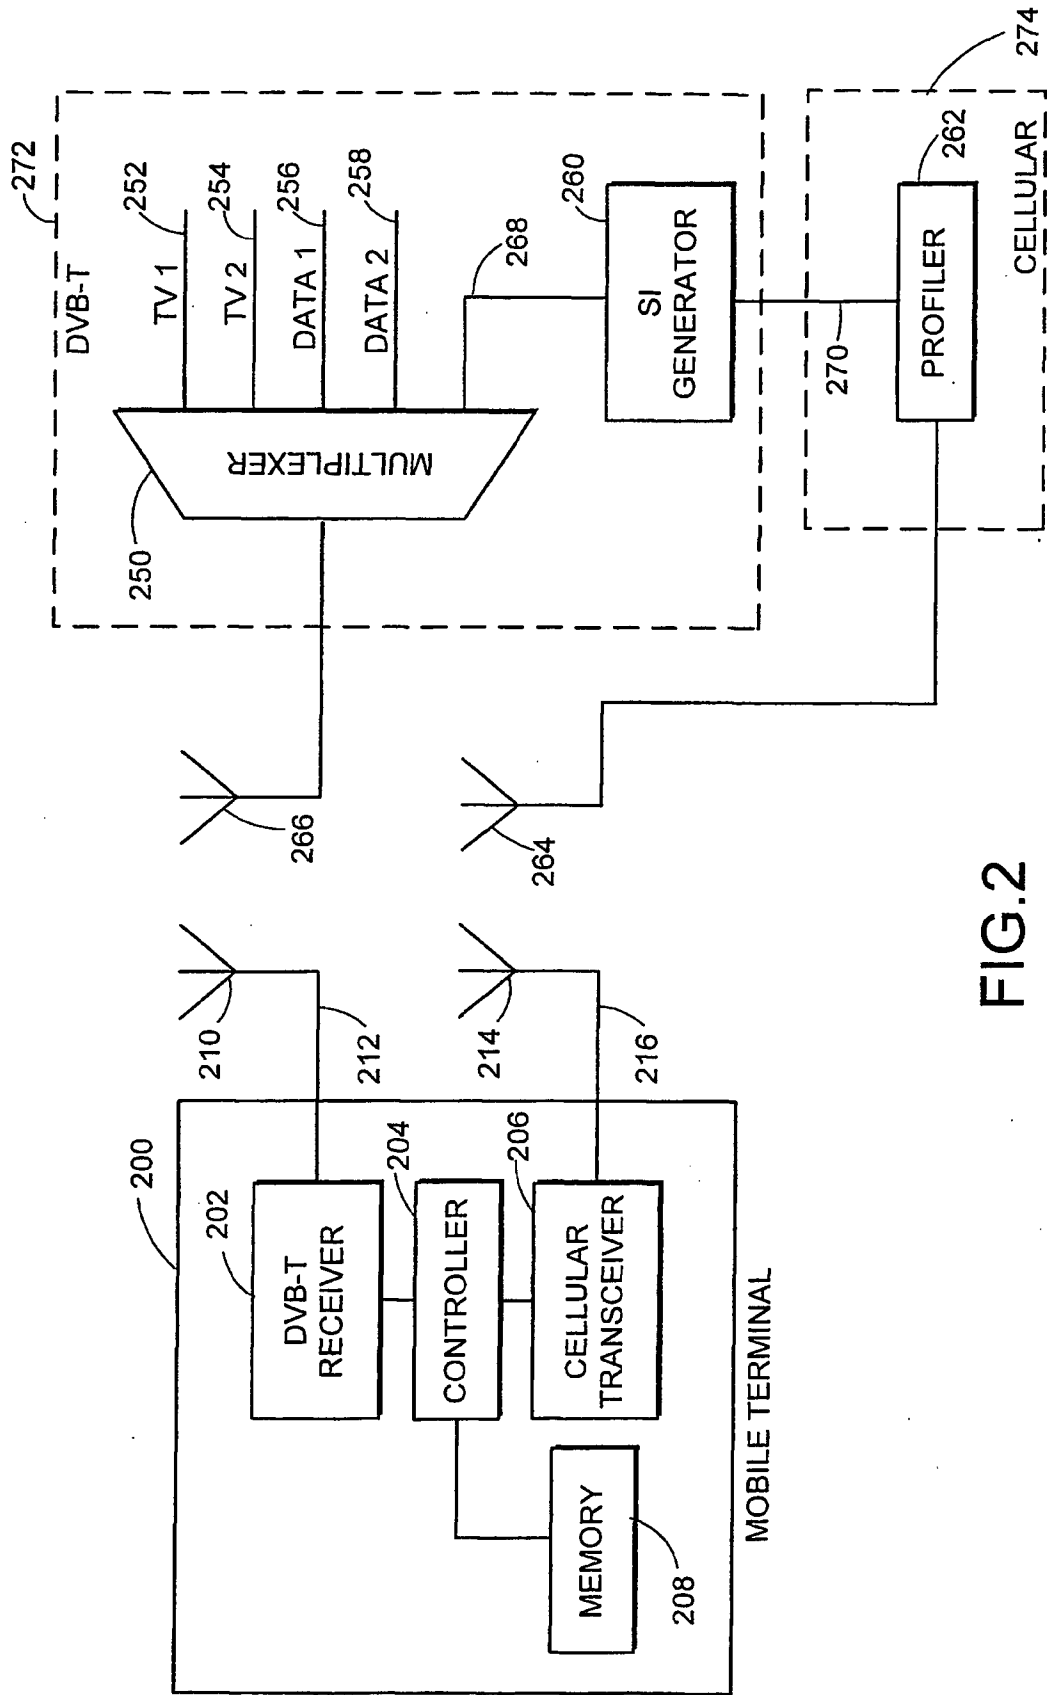


FIG.2

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



THE WORLD INTELLECTUAL PROPERTY ORGANIZATION IS A SPECIAL AGENCY OF THE UNITED NATIONS

(43) International Publication Date
3 January 2002 (03.01.2002)

PCT

(10) International Publication Number
WO 02/01879 A3

- (51) International Patent Classification⁷: H04N 7/24
- (21) International Application Number: PCT/EP01/07209
- (22) International Filing Date: 25 June 2001 (25.06.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0016238.8 30 June 2000 (30.06.2000) GB
- (71) Applicant: NOKIA OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventors: AALTONEN, Janne; Hirvikoirankatu 15, FIN-20900 Turku (FI). SALO, Juha; Noppakatu 6 b 3, FIN-20660 Littainen (FI).
- (74) Agents: JOHNSON, Ian et al.; Nokia IPR Department, Nokia House, Summit Avenue, Farnborough., Hampshire GU 14 ONG (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

- (88) Date of publication of the international search report:
25 April 2002

[Continued on next page]

(54) Title: RECEIVER

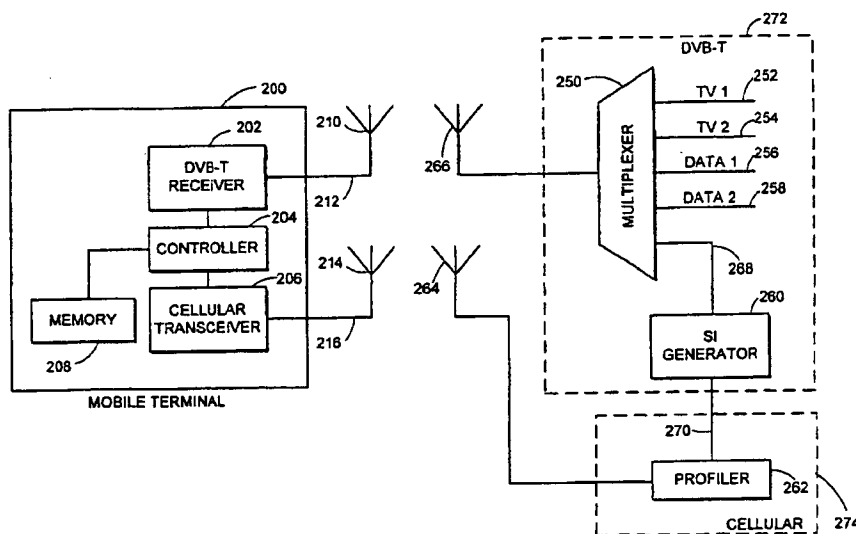

(57) Abstract: The present invention relates to receivers such as multi-carrier and cellular receivers. Cellular receivers, in the form of portable radiotelephones are commonplace, and their design and operation is well understood. Such portable radiotelephones can be used for making and receiving telephone calls, sending and receiving messages, and even browsing world-wide computer network such as the Internet. Many standards exist for portable radiotelephones, including global system for mobile communications (GSM), general radio packet service (GPRS) Receivers capable of receiving digital television signals, such as signals according to the terrestrial digital video broadcasting (DVB-T) standard are also commonplace. The present invention provides a method and apparatus for receiving and transmitting signals via multiple communication channels.

WO 02/01879 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/07209

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 052 145 A (WESTBERG THOMAS E ET AL) 18 April 2000 (2000-04-18) column 2, line 11 - line 22 column 2, line 36 - line 47 column 4, line 10 - column 5, line 44 column 11, line 20 - line 59 column 12, line 20 - line 30 column 19, line 23 - line 34 figures 2-4 --- -/--	1-44



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Δ document member of the same patent family

Date of the actual completion of the international search

14 February 2002

Date of mailing of the international search report

21/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fantini, F

INTERNATIONAL SEARCH REPORT

In International Application No

PCT/EP 01/07209

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 04568 A (FERRIS GAVIN ROBERT ;RADIOSCAPE LTD (GB); FLORENCE PETER CHARLES () 28 January 1999 (1999-01-28) abstract page 4, line 15 - line 26 page 5, line 7 - line 17 page 7, line 1 -page 8, line 5 page 12, line 14 -page 13, line 9 page 13, line 26 -page 14, line 2 page 19, line 15 -page 20, line 5 figure 3	1,4-18, 20-28, 37-44
A	----- WO 00 18123 A (GUIDE E INC ;YUEN HENRY C (US)) 30 March 2000 (2000-03-30) abstract page 1, line 31 -page 2, line 13 page 3, line 10 - line 20 page 3, line 34 -page 4, line 3 page 4, line 21 - line 29 figures 2,3	2,3,19, 29-36
X	----- EP 0 999 678 A (CITIBANK NA) 10 May 2000 (2000-05-10) column 4, line 5 - line 23 column 6, line 4 - line 17 column 15, line 27 - line 46 figure 2	1,7-9, 11, 15-18, 22, 26-28, 37,38, 41-44
A	----- EP 0 782 364 A (LSI LOGIC CORP) 2 July 1997 (1997-07-02) ----- EP 0 804 012 A (NOKIA MOBILE PHONES LTD) 29 October 1997 (1997-10-29) ----- US 6 005 603 A (FLAVIN ROBERT ALAN) 21 December 1999 (1999-12-21) -----	2-6,10, 12-14, 19-21, 23-25, 29-36, 39,40
X	----- EP 0 999 678 A (CITIBANK NA) 10 May 2000 (2000-05-10) column 4, line 5 - line 23 column 6, line 4 - line 17 column 15, line 27 - line 46 figure 2	1,11,18, 22
A	----- EP 0 782 364 A (LSI LOGIC CORP) 2 July 1997 (1997-07-02) ----- EP 0 804 012 A (NOKIA MOBILE PHONES LTD) 29 October 1997 (1997-10-29) ----- US 6 005 603 A (FLAVIN ROBERT ALAN) 21 December 1999 (1999-12-21) -----	2-10, 12-17, 19-21, 23-44

INTERNATIONAL SEARCH REPORT

Information on patent family members

In. tional Application No

PCT/EP 01/07209

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6052145	A	18-04-2000	WO 0101699 A1	04-01-2001
			US 6233734 B1	15-05-2001
			AU 4837199 A	31-01-2001
WO 9904568	A	28-01-1999	EP 0995313 A1	26-04-2000
			WO 9904568 A1	28-01-1999
WO 0018123	A	30-03-2000	AU 6048299 A	10-04-2000
			WO 0018123 A1	30-03-2000
EP 0999678	A	10-05-2000	AU 5828099 A	11-05-2000
			CN 1259822 A	12-07-2000
			EP 0999678 A2	10-05-2000
			JP 2000232528 A	22-08-2000
EP 0782364	A	02-07-1997	US 6111863 A	29-08-2000
			EP 0782364 A2	02-07-1997
			JP 9219890 A	19-08-1997
EP 0804012	A	29-10-1997	FI 961750 A	24-10-1997
			EP 0804012 A2	29-10-1997
			JP 10098706 A	14-04-1998
			US 6172673 B1	09-01-2001
US 6005603	A	21-12-1999	NONE	